



Salient Features

- Screwed Ends to BSP Female Inlet and 5/8" BSP Male Outlet.
- Two Piece Design.
- Quarter Turn, Lever Operated for convenient manoeuvring.
- Stainless Steel (AISI 304) rust proof perforated sheet screen provided in the strainer.
- Stainless Steel, Rust Free and Robust Lever.
- Most suitable for refrigeration and H.V.A.C applications.

This item can also be supplied without strainer.

Suitable For

Steam
Water
Oil
Air
Gases


Test Pressure (Hydraulic) Shell : 20 kg/cm²g (300 psig) Seat : 13.50 kg/cm²g (192 psig)

Materials of Construction

Name of Part	Material	Specification
Body, Bonnet & Bottom Cover	Bronze	IS 318 Gr. LTB 2
Ball	Stainless Steel	AISI 304
Stem	S.S / Brass	AISI 410 / IS 6912 Gr. FLB
Disc & Packing	PTFE	BS EN 12086-1
Lever	Stainless Steel	AISI 304
Screen	Stainless Steel	AISI 304
Gland	Forged Brass	IS 6912 Gr. FLB

Sizes / Dimensions

Inches	mm	A	B	C	D
1/2	15	87	1/2"	34	5/8"
3/4	20	114	3/4"	36	5/8"
1	25	126	1"	44	5/8"

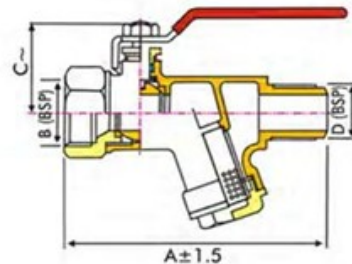

Zoloto Industries
Zoloto House, 11th Milestone, Lambra, Nakodar Road,
Jalandhar - 144 026
Punjab, India

Phones : +91 181 4676666 (100 Lines)
Facsimile : +91 181 2792500 & 2251600
Email : zoloto@vsnl.com & sales@zolotovalves.com
Web : http://www.zolotovalves.com