



Salient Features

- Screwed Male End to IS 554 / BS 21 / ISO 7.
- Provided with Hard Chrome Plated Brass Ball.
- Quarter Turn, Lever Operated.
- Chrome Plated Body and Bonnet.

Suitable For

Steam
Water ■
Oil
Air
Gases


Test Pressure (Hydraulic) Shell : 25 kg/cm²g (350 psig) Seat : 16 kg/cm²g (225 psig)

Materials of Construction

Name of Part	Material	Specification
Body, Stem & Gland	Forged Brass	IS 6912 Gr. FLB
Body Seat Rings	PTFE	BS EN 12086-1
Ball	Forged Brass	IS 6912 Gr. FLB Hard Chrome Plated
Thrust Washer	PTFE	BS EN 12086-1
Packing Ring	PTFE	BS EN 12086-1
Lever	Carbon Steel	IS 2062
Nut	Carbon Steel	IS 1367

Sizes / Dimensions

Inches	mm	A	B
1/2	15	115	34

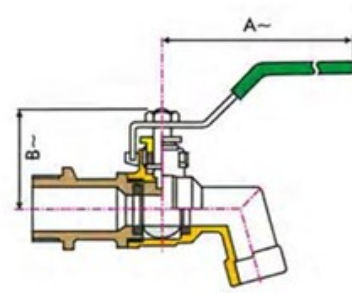

Zoloto Industries
Zoloto House, 11th Milestone, Lambra, Nakodar Road,
Jalandhar - 144 026
Punjab, India

Phones : +91 181 4676666 (100 Lines)
Facsimile : +91 181 2792500 & 2251600
Email : zoloto@vsnl.com & sales@zolotovalves.com
Web : http://www.zolotovalves.com